


◇ User Manual ◇

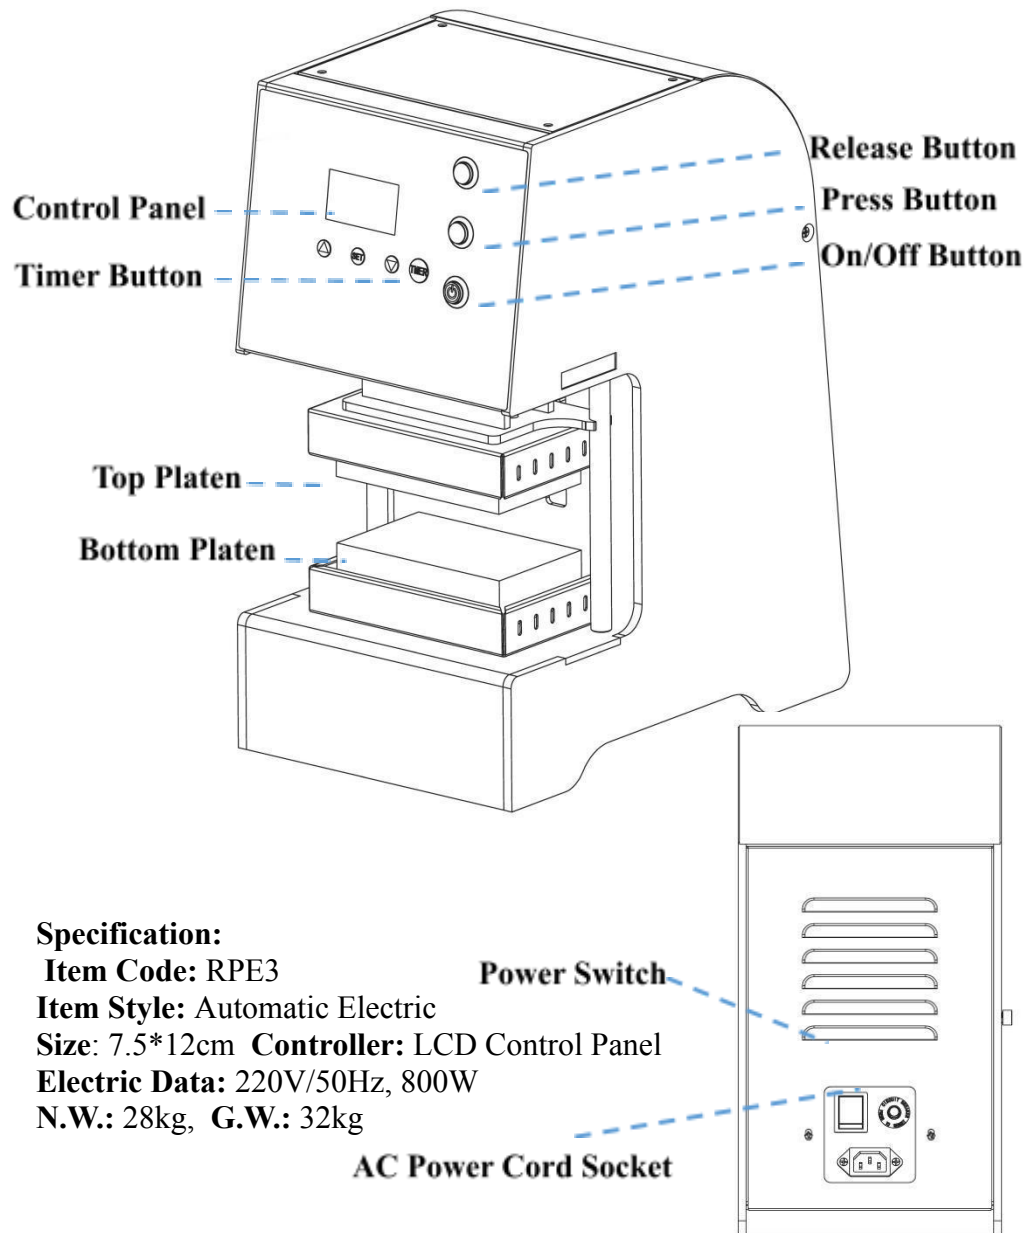

Specification:

Item Code: RPE3

Item Style: Automatic Electric

Size: 7.5*12cm **Controller:** LCD Control Panel

Electric Data: 220V/50Hz, 800W

N.W.: 28kg, **G.W.:** 32kg

“Rosin Tech” is a new form of home hash production which has taken Instagram by storm due to its simplicity and the quality of the product it produces. Essentially, Rosin Tech involves using a heat press to combine heat and pressure as an extraction method. The extraction process involves pressing nuggets of hemp between parchment paper with a heat press to extract the valuable hemp oil, it depends upon 4 things:

- Temperature; Amount of Time Pressed
- Amount of Force Applied; Size/Weight of nuggets

1. Read Before Use

1. Use the device as intended.
2. Please keep away children from the device.
3. Please make sure the correct outlet is before using the device.
4. Cautious, burns can occur when contact with a hot surface.
5. Turn the Device off when not in use and remove the plug.

2. Recommended Accessories

25 lb or Thicker Silicone Parchment Paper Sheets
Filters Bag Size 5*10cm
Rosin Scraper Tool Set

3. Recommended Operation Parameter

Time: 15~20sec.

Temp.: 120°C

Pressure: Press and Hold the “Press” button until the upper heating plate closes up with the lower heating plate

4. Control Panel Setting

1. Press the SET button on the control panel (Fig. 1) to go to the temperature setting mode for the top platen.
2. . Press the Up or Down buttons to select the desired temperature (Fig.2). The selected temperature is shown on the upper line of the display.

Tip: Enter the temperature either in °F or °C; you will be able to select the temperature scale later.

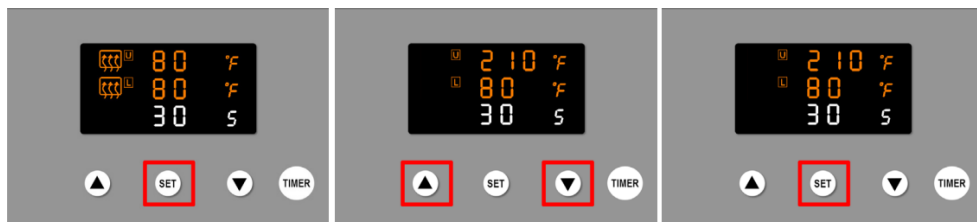


Fig. 1

Fig. 2

Fig. 3

3. Press the SET button again (Fig. 3) to go to the temperature setting mode for the bottom platen.

4. Press the Up or Down buttons to select the desired temperature (Fig.4). The selected temperature is shown on the lower line of the display.

5. Press the SET button again (Fig. 5) to go to the timer setting mode.

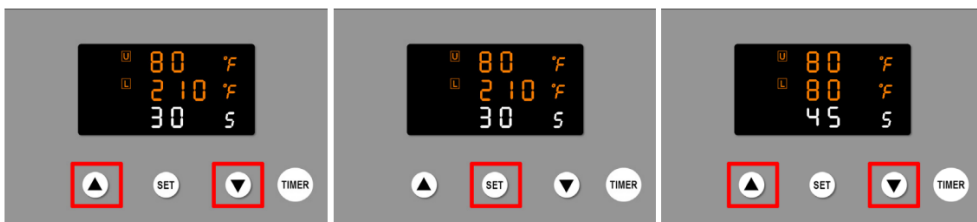


Fig. 4

Fig. 5

Fig. 6

6. Press the Up or Down buttons to select the desired time in seconds (Fig. 6).

7. Press the SET button to go to the temperature scale selection mode (Fig. 7).

Tip: Depending on your machine's default settings, you may either see "F" or "C" on the display indicating the currently selected temperature scale (°F or °C).

8. Press the Up or Down buttons to select either °F or °C (Fig. 8) OR skip this step if you are satisfied with the current selection.

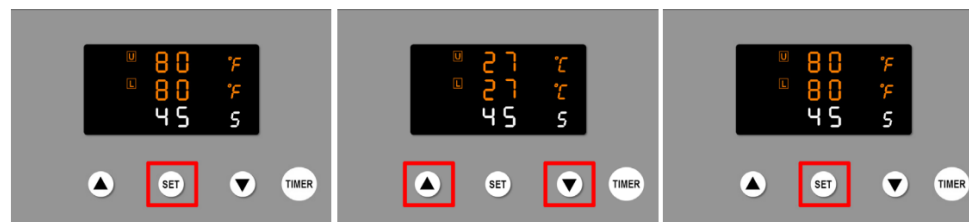


Fig. 7

Fig. 8

Fig. 9

9. Press the SET button once more (Fig. 9) to record all control panel's settings. The platens start heating, and the heating icons are now displayed on the screen (Fig. 10)



Fig. 10

Fig. 11

Fig. 12

5. How to Use Rosin Press

- Take out Rosin Press from the package.
- Plug in the power socket, turn on the power switch, and set temp.&time for each control panel, Say. 230°F/110°C, 30sec. and raises to the set temp.
- Use parchment paper to cover the prepared material and place it in the center of the bottom platen.
- Push the Down button to lower the top platen and start pressing.
- Press the TIMER button on the control panel. The control panel starts showing a countdown.
- Wait until the countdown ends and the press starts beeping. Press the TIMER button again to turn off the timer and stop the beeping.
- Push the UP button to stop pressing and lift up the top platen.
- Remove the pressed material using heat-resistant gloves or tools and exercise extreme caution.

- Turn off the machine by flipping the ON/OFF switch when done pressing. Unplug and then disconnect the AC power cord from the press. Wait until the platens cool down completely to clean and store the press.
- Rosin oil will be adhesive on the parchment paper, you will need to use the rosin tool to collect the oil when it cools down, and store it in the silicon jar.