

## ● How to Rosin Press?


- Take out rosin press from package.
- Plug in the power socket, turn on the power switch ,set temp.&time for each control panel, Say. 230 ℉ /110 ℃ , 30sec. and raises to the set temp.
- Put the rosin hash or seeds into a filter bag
- Use parchemnt paper to cover the filter bag before placing on the lower heating element.
- Press the TIMER button on the control panel. The control panel starts showing a countdown.
- Wait until the countdown ends and the press starts beeping. Press the TIMER button again to turn off the timer and stop beeping.
- For machine operate, firstly you need to adjust machine pressing force through pressure nut, turning the pressure nut from right to left for higher pressing force, in opposite, reduce the pressure.  
Please kindly noted that do not adjust the pressure too high, and press it by jumping up, use your whole body's weight to press down, it will damage the machine handle, and influence the machine service life.
- Rosin oil will be adhesive on the parchment paper, you will need to use the rosin tool to collect the oil when it cools down, and store it on the silicon jar.

## ● Reference Parameter

Time: 30~40sec.

Temp.: 230~250 ℉ /110~120 ℃

Pressure: Feel by feeling, when you feel the pressure is enough and hard to pressure down the handle.

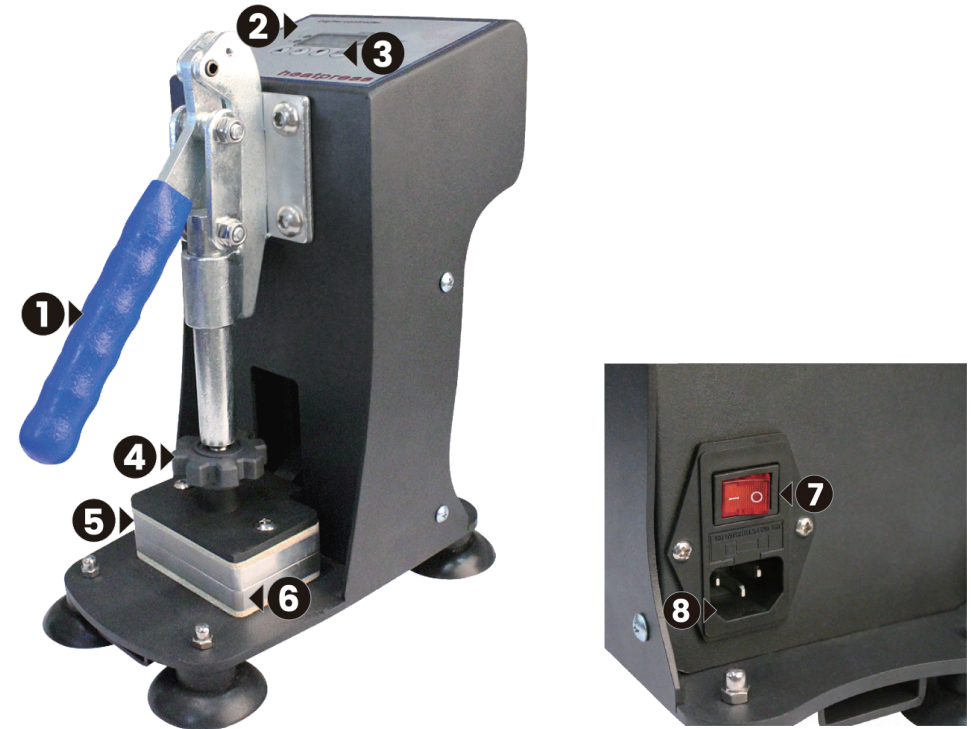

- |                       |                        |                       |
|-----------------------|------------------------|-----------------------|
| 1.Press Handle        | 2.Control Panel        | 3.Timer ON/OFF Button |
| 4.Pressure Nut        | 5.Top Heating Plate    | 6.Lower Heating Plate |
| 7.ON/OFF Power Switch | 8.AC Power Cord Socket |                       |

## ● Inside Box

Machine、 Power Cable、 Use Manual



## ● Read Before Use

1. Use the Rosin press only as intended.
2. Please keep away children from the machine.
3. Please make sure correct outlet before use the device.
4. Cautions, burns can be occur when contact with hot surface.
5. Turn off the Device when not in use and remove the plug.

## ● Product Specification

Product Sku.: HP230C-X

Product Name: Rosin-tech Heat Press

Product Style: Mini Mechanism

Electric Data:

US: 110V/60Hz, 110W

EU: 220V/50Hz, 110W


Size: 5 x 7.5cm/2 x 3inch

Controller: Digital Control Panel


N.W.: 4.5kg, G.W.: 5kg

PKG: 29\*20\*31cm


## ● Control Panel Setting

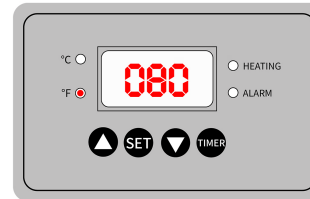



Control Panel Window

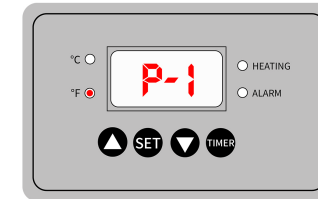

P-1: Temp. Setting Mode  
Touch SET & ▲▼ to set desired Temp.




P-2: Time. Setting Mode  
Touch SET & ▲▼ to set desired Time.

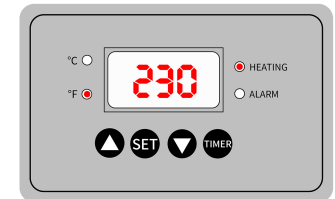
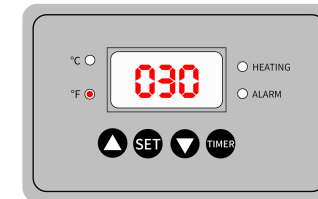


Touch SET key to finish all setting and machine heats up.

### If There is P-3 Setting



P-3: Switch between °F or °C.  
Touch SET & ▲▼ to switch between °F or °C.

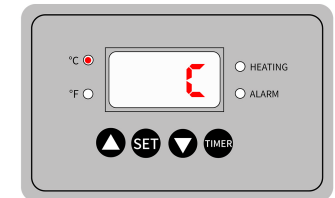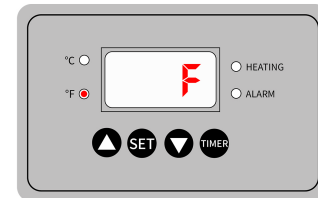

Touch SET key to finish all setting and machine heats up.